


Key Features

- 1ms (MPRT) response time for precision
- 100Hz FreeSync to eliminate screen tearing and reduce stuttering
- Lifelike color display with 10-bit color depth
- HDMI and VGA inputs for connectivity
- Eye ProTech for comfortable viewing



Product **Description**

The ViewSonic VA2715-H is a 27" Full HD monitor with HDMI and VGA input for business or home usage. Delivering a stunning image quality with low power consumption, this monitor provides six ViewMode presets that deliver optimized screen performance based on your needs. FreeSync means no tearing or stuttering even when gaming. The eye care technology that comes standard with all VA monitors helps to eliminate eyestrain from extended viewing periods. A VESA-compatible mount makes this monitor is easy to setup on the wall or with a wide range of industry-standard mounts.

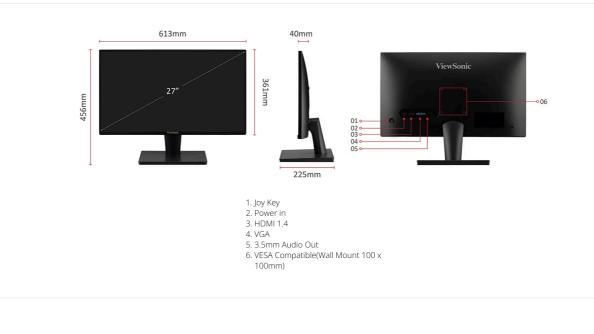



ViewSonic VA2715-H 27" Full HD Monitor - Datasheet - ViewSonic Europe

PM	ViewSonic VA2715-H 27" Ful	I HD Monitor - Datasheet - ViewS	onic Europe
DISPLAY		OPERATING CONDITIONS	
Display Size (in.):	27	Temperature:	32°F to 104°F (0°C to 40°C)
Viewable Area (in.):	27	Humidity (non-condensing):	20% to 90%
Panel Type:	VA Technology	WALL MOUNT	
Resolution:	1920 x 1080	VESA Compatible:	100 x 100 mm
Resolution Type:	FHD (Full HD)	INPUT SIGNAL	
Static Contrast Ratio:	4,000:1 (typ)	Frequency Horizontal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 30 ~ 125KHz
Dynamic Contrast Ratio:	50M:1		RGB Analog: 48 ~ 75Hz, HDMI
Light Source:	LED	Frequency Vertical:	(v1.4): 48 ~ 100Hz
Brightness:	250 cd/m² (typ)	VIDEO INPUT	
Colors:	16.7M	Digital Sync:	TMDS - HDMI (v1.4)
Color Space Support:	8 bit true	Analog Sync:	Separate - RGB Analog
Aspect Ratio:	16:9	ERGONOMICS	
Response Time (MPRT):	1ms	Tilt (Forward/Back):	-5° / 20°
Viewing Angles:	178º horizontal, 178º vertical	WEIGHT (IMPERIAL)	
Backlight Life (Hours):	30000 Hrs (Min)	Net (lbs):	7.9
Curvature:	Flat	Net Without Stand (lbs):	6.8
Refresh Rate (Hz):	100	Gross (lbs):	11
Variable Refresh Rate	FreeSype	WEIGHT (METRIC)	
Technology:	FreeSync	Net (kg):	3.6
Low Blue Light:	Software solution	Net Without Stand (kg):	3.1
Flicker-Free:	Yes	Gross (kg):	5
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)	DIMENSIONS (IMPERIAL) (V	•
Pixel Size:	0.311 mm (H) x 0.311 mm (V)	Packaging (in.):	27.1 x 17.6 x 5
Surface Treatment:	Anti-Glare, Hard Coating (3H)	Physical (in.):	24.1 x 18 x 8.1
COMPATIBILITY	, e.a.e,a.e eeag (e,	Physical Without Stand (in.):	24.1 x 14.2 x 1.6
PC Resolution (max):	1920x1080	DIMENSIONS (METRIC) (WX	
Mac® Resolution (max):	1920x1080	Packaging (mm):	688 x 448 x 128
	Windows 10/11 certified; macOS	Physical (mm):	613 x 456 x 205
PC Operating System:	tested	Physical Without Stand (mm):	613 x 361 x 40
Mac® Resolution (min):	1920x1080	GENERAL	
CONNECTOR			cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, CE,
VGA:	1	Regulations:	CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC,
3.5mm Audio Out:	1		UkrSEPRO
HDMI 1.4:	1		VA2715-H x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC
Power in:	DC Socket (Center Positive)	PACKAGE CONTENTS:	Àdapter x1, Quick Start Guide x1
POWER			Please dispose of in accordance
Eco Mode (Conserve):	12W	Recycle/Disposal:	with local, state or federal laws.
Eco Mode (optimized):	15W	Warranty:	*Warranty offered may differ from market to market
Consumption (typical):	17W	Power Management:	Energy Star standards, EPEAT
Consumption (max):	28W	r ower management.	Energy of a standards, Er Erti
Voltage:	AC 100-240V		
Stand-by:	0.5W		
Power Supply:	External Power Adaptor		
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
CONTROLS			
Physical Controls:	U, R, D, L, EN (power)		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		

Copyright $\ensuremath{\mathbb{C}}$ ViewSonic Corporation 2000-2025. All rights reserved.